

log4c

1.2.1

Generated by Doxygen 1.7.3

Sun Sep 16 2012 09:02:14

Contents

1 Log4c : Logging for C Library	1
1.1 Summary	1
1.2 Requirements	1
1.2.1 Platforms	1
1.2.2 Software	2
1.3 Installation	2
1.3.1 Building from source tarballs	2
1.3.2 Using RPMs	3
1.4 Configuration	3
1.4.1 Configuration files	3
1.4.2 Configuration syntax	3
1.4.3 Environment variables	4
1.5 Customization	4
1.6 Thanks	4
1.7 Copyright	4
2 Todo List	5
3 Deprecated List	5
4 Bug List	5
5 Data Structure Index	6
5.1 Data Structures	6
6 File Index	6
6.1 File List	6
7 Data Structure Documentation	7
7.1 log4c_appender_type Struct Reference	7
7.1.1 Detailed Description	7
7.2 log4c_buffer_t Struct Reference	8
7.2.1 Detailed Description	8
7.3 log4c_layout_type Struct Reference	8
7.3.1 Detailed Description	8
7.4 log4c_location_info_t Struct Reference	8
7.4.1 Detailed Description	9
7.5 log4c_logging_event_t Struct Reference	9
7.5.1 Detailed Description	9
7.6 log4c_rc_t Struct Reference	10
7.6.1 Detailed Description	10
7.7 log4c_rollingpolicy_type Struct Reference	10
7.7.1 Detailed Description	10
8 File Documentation	11
8.1 appender.h File Reference	11
8.1.1 Detailed Description	12
8.1.2 Define Documentation	12
8.1.3 Typedef Documentation	13

8.1.4	Function Documentation	13
8.2	appender_type_mmap.h File Reference	18
8.2.1	Detailed Description	18
8.2.2	Variable Documentation	19
8.3	appender_type_rollingfile.h File Reference	19
8.3.1	Detailed Description	20
8.3.2	Function Documentation	20
8.3.3	Variable Documentation	22
8.4	appender_type_stream.h File Reference	22
8.4.1	Detailed Description	23
8.4.2	Variable Documentation	23
8.5	appender_type_stream2.h File Reference	23
8.5.1	Detailed Description	24
8.5.2	Function Documentation	25
8.5.3	Variable Documentation	26
8.6	appender_type_syslog.h File Reference	26
8.6.1	Detailed Description	27
8.6.2	Variable Documentation	27
8.7	buffer.h File Reference	27
8.7.1	Detailed Description	28
8.8	category.h File Reference	28
8.8.1	Detailed Description	30
8.8.2	Define Documentation	30
8.8.3	Typedef Documentation	30
8.8.4	Function Documentation	30
8.9	init.h File Reference	41
8.9.1	Detailed Description	41
8.9.2	Function Documentation	41
8.10	layout.h File Reference	42
8.10.1	Detailed Description	43
8.10.2	Define Documentation	43
8.10.3	Typedef Documentation	44
8.10.4	Function Documentation	44
8.11	layout_type_basic.h File Reference	47
8.11.1	Detailed Description	48
8.12	layout_type_basic_r.h File Reference	48
8.12.1	Detailed Description	49
8.13	layout_type_dated.h File Reference	49
8.13.1	Detailed Description	49
8.14	layout_type_dated_r.h File Reference	50
8.14.1	Detailed Description	50
8.15	location_info.h File Reference	50
8.15.1	Detailed Description	51
8.15.2	Define Documentation	51
8.16	logging_event.h File Reference	52
8.16.1	Detailed Description	52
8.16.2	Function Documentation	52
8.17	priority.h File Reference	53
8.17.1	Detailed Description	54
8.17.2	Enumeration Type Documentation	54

8.17.3	Function Documentation	55
8.18	rc.h File Reference	55
8.18.1	Detailed Description	56
8.18.2	Function Documentation	56
8.18.3	Variable Documentation	56
8.19	rollingpolicy.h File Reference	56
8.19.1	Detailed Description	58
8.19.2	Define Documentation	58
8.19.3	Typedef Documentation	58
8.19.4	Function Documentation	59
8.20	rollingpolicy_type_sizewin.h File Reference	62
8.20.1	Detailed Description	63
8.20.2	Typedef Documentation	63
8.20.3	Function Documentation	63
8.21	version.h File Reference	64
8.21.1	Detailed Description	65
8.21.2	Define Documentation	65
8.21.3	Function Documentation	65
8.21.4	Variable Documentation	65

1 Log4c : Logging for C Library

1.1 Summary

Log4c is a library of C for flexible logging to files, syslog and other destinations. It is modeled after the Log for Java library (<http://jakarta.apache.org/log4j/>), staying as close to their API as is reasonable. Here is a short introduction to Log4j which describes the API, and design rationale.

Mark Mendel started a parallel log4c projet with a different philosophy. The design is macro oriented, so much lighter and faster which perfect for kernel development.

Log4c is also available from SourceForge (<http://www.sourceforge.net/projects/log4c/>). This is work in progress.

1.2 Requirements

1.2.1 Platforms

log4c was successfully compiled and run on the following platforms :

- HP-UX release 11.00
- Tru 64 release 4.0F and 5.1
- Red Hat Linux Intel release 7.x, 8, 9
- Red Hat Enterprise Linux 3, 4

- Solaris Intel release 8, 9, 10
- FreeBSD 6.1-RELEASE
- AIX 5.3 (with xlc compiler)
- Mac OS X
- Windows X

log4c should compile and run on the following platforms :

- The BSD family
- Other Linux distributions

1.2.2 Software

The following softwares are needed to generate log4c:

- GCC 3.0.1+, to generate log4c, but hopefully not to use it.
- doxygen 1.2.13+, a documentation system for C/C++ needed to generate the documentation.
- graphviz, the AT&T Graph Visualization Tools also needed to generate the documentation.

For the moment, log4c uses specific GCC extensions, like `__attribute__`, so you will need GCC to compile it. This will probably change one day.

1.3 Installation

1.3.1 Building from source tarballs

on SourceForge:

- `log4c-1.2.1.tar.gz`

The log4c package uses the GNU autotools compilation and installation framework. The following commands should build log4c on the supported platforms:

```
$ gzip -dc log4c-1.2.1.tar.gz | tar tvf -
$ cd log4c-1.2.1/
$ ./configure --prefix=/path/of/installation
$ make
$ make install
```

Checkout the `INSTALL` file for installation and the generated doxygen documentation for more information.

1.3.2 Using RPMs

FC7 RPMs on SourceForge:

- log4c-1.2.1-1.i386.rpm
- log4c-devel-1.2.1-1.i386.rpm
- log4c-doc-1.2.1-1.i386.rpm

The following command install the log4c RPMs :

```
$ sudo rpm -Uvh log4c-1.2.1.i386.rpm log4c-devel-1.2.1.i386.rpm
```

1.4 Configuration

1.4.1 Configuration files

log4c searches the following files to load its configuration:

- \${LOG4C_RCPATH}/log4crc
- \${HOME}/.log4crc
- ./log4crc

The environment variable LOG4C_RCPATH holds the prefix used for installation.

1.4.2 Configuration syntax

The `log4crc` configuration file uses an XML syntax. The root element is `<log4c>` and it can be used to control the configuration file version interface with the attribute "version". The following 4 elements are supported: `<config>`, `<category>`, `<appender>` and `<layout>`.

- The `<config>` element controls the global log4c configuration. It has 3 sub elements. The `<nocleanup>` flag inhibits the log4c destructors routines. The `<bufsize>` element sets the buffer size used to format `log4c_logging_event_t` (p. 9) objects. If is set to 0, the allocation is dynamic (the `<debug>` element is currently unused).
- The `<category>` element has 3 possible attributes: the category "name", the category "priority" and the category "appender". Future versions will handle multiple appenders per category.
- The `<appender>` element has 3 possible attributes: the appender "name", the appender "type", and the appender "layout".

- The `<layout>` element has 2 possible attributes: the layout "name" and the layout "type".

Here's the default `log4crc` configuration file:

This initial version of the log4c configuration file syntax is quite different from log4j. XML seemed the best choice to keep the log4j configuration power in a C API.

1.4.3 Environment variables

- `LOG4C_RCPATH` holds the path to the main `log4crc` configuration file
- `LOG4C_PRIORITY` holds the "root" category priority
- `LOG4C_APPENDER` holds the "root" category appender

1.5 Customization

This section will, one day, briefly describe how to define custom appenders and custom layouts. Be patient or checkout the source.

1.6 Thanks

Mark Mendel for his work on a previous version of log4c.

This project would not have existed without Ceki Gulcu, the creator and maintainer of Log4j, nor without Bastiaan Bakker, who intiated me with Log4Cpp.

Many thanks to

- Joel Schaubert for many contributions
- Robert Byrne for Windows port and also many contributions
- Olger Warnier for the Mac OS X port
- Jeff Smith for writing a primer on how to use Log4c effectively

1.7 Copyright

All software in this package is Copyright (C) 2003-2004 Meiosys <http://www.meiosys.com> and Cedric Le Goater and is distributed under the LGPL License. See the COPYING file for full legal details.

2 Todo List

File appender.h (p. 11) the appender interface needs a better configuration system depending on the layout type. The udata field is a just a trick.

File layout.h (p. 42) the layout interface needs a better configuration system depending on the layout type. The udata field is a just a trick.
a pattern layout would be welcomed !!

Global log4c_category_get_chainedpriority (p. 33)(const log4c_category_t *a_category)
the log4c_category_t is designed so that this method executes as quickly as possible. It could even be faster if the set priority was propagated through the children hierarchy of a category.

Global log4c_category_set_appender (p. 40)(log4c_category_t *a_category, struct __log4c_appender *a_appender)
need multiple appenders per category

Class log4c_location_info_t (p. 8) this is not used

Global log4c_logging_event_new (p. 53)(const char *a_category, int a_priority, const char *a_message)
need to handle multi-threading (NDC)

3 Deprecated List

Global log4c_appender_type_define (p. 12)(a_type) This macro, and the static initialization of appenders in general, is deprecated. Use rather the **log4c_appender_type_set()** (p. 17) function to initialize your appenders before calling **log4c_init()** (p. 42)

Global log4c_layout_type_define (p. 43)(a_type) This macro, and the static initialization of layouts in general, is deprecated. Use rather the **log4c_layout_type_set()** (p. 47) function to initialize your appenders before calling **log4c_init()** (p. 42)

4 Bug List

Global log4c_appender_append (p. 13)(log4c_appender_t *a_appender, log4c_logging_event_t (p. 9) *a_event)
is this the right place to open an appender ?

Global log4c_category_get (p. 32)(const char *a_name) the root category name should be "" not "root". *

5 Data Structure Index

5.1 Data Structures

Here are the data structures with brief descriptions:

log4c_appender_type (Log4c appender type class)	7
log4c_buffer_t (Buffer object)	8
log4c_layout_type (Log4c layout type class)	8
log4c_location_info_t (Logging location information)	8
log4c_logging_event_t (Logging event object)	9
log4c_rc_t (Resource configuration object)	10
log4c_rollingpolicy_type (Log4c rollingpolicy type. Defines the interface a specific policy must provide to the rollingfile appender)	10

6 File Index

6.1 File List

Here is a list of all documented files with brief descriptions:

appender.h (Implement this interface for your own strategies for print- ing log statements)	11
appender_type_mmap.h (Log4c mmap(2) appender interface)	18
appender_type_rollingfile.h (Log4c rolling file appender interface)	19
appender_type_stream.h (Log4c stream appender interface)	22
appender_type_stream2.h (Log4c stream2 appender interface)	23
appender_type_syslog.h (Log4c syslog(3) appender interface)	26
buffer.h (Log4c buffer)	27
category.h (Central class in the log4c package)	28
config-win32.h	??
init.h (Log4c constructors and destructors)	41
layout.h (Interface for user specific layout format of log4c_logging_event events)	42

layout_type_basic.h (Implement a basic layout)	47
layout_type_basic_r.h (Implement a basic_r layout)	48
layout_type_dated.h (Implement a dated layout)	49
layout_type_dated_r.h (Implement a dated_r layout)	50
location_info.h (The internal representation of caller location information)	50
logging_event.h (Internal representation of logging events)	52
priority.h (The priority class provides importance levels with which one can categorize log messages)	53
rc.h (Log4c resource configuration)	55
rollingpolicy.h (Log4c rolling policy interface. Defines the interface for managing and providing rolling policies)	56
rollingpolicy_type_sizewin.h (Log4c rolling file size-win interface. Log4c ships with (and defaults to) the classic size-window rollover policy: this triggers rollover when files reach a maximum size. The first file in the list is always the current file; when a rollover event occurs files are shifted up by one position in the list--if the number of files in the list has already reached the max then the oldest file is rotated out of the window)	62
version.h (Log4c version information)	64

7 Data Structure Documentation

7.1 log4c_appender_type Struct Reference

log4c appender type class
`#include <appender.h>`

7.1.1 Detailed Description

log4c appender type class Attributes description:

- name appender type name
- open
- append
- close

The documentation for this struct was generated from the following file:

- **appender.h**

7.2 log4c_buffer_t Struct Reference

buffer object

```
#include <buffer.h>
```

7.2.1 Detailed Description

buffer object Attributes description:

- `size` current size of the buffer
- `maxsize` maximum size of the buffer. 0 means no limitation.
- `data` raw data

The documentation for this struct was generated from the following file:

- **buffer.h**

7.3 log4c_layout_type Struct Reference

log4c layout type class

```
#include <layout.h>
```

7.3.1 Detailed Description

log4c layout type class Attributes description:

- `name` layout type name
- `format`

The documentation for this struct was generated from the following file:

- **layout.h**

7.4 log4c_location_info_t Struct Reference

logging location information

```
#include <location_info.h>
```

7.4.1 Detailed Description

logging location information Attributes description:

- loc_file file name
- loc_line file line
- loc_function function name
- loc_data user data

Todo

this is not used

The documentation for this struct was generated from the following file:


- **location_info.h**

7.5 log4c_logging_event_t Struct Reference

logging event object

```
#include <logging_event.h>
```

Collaboration diagram for log4c_logging_event_t:

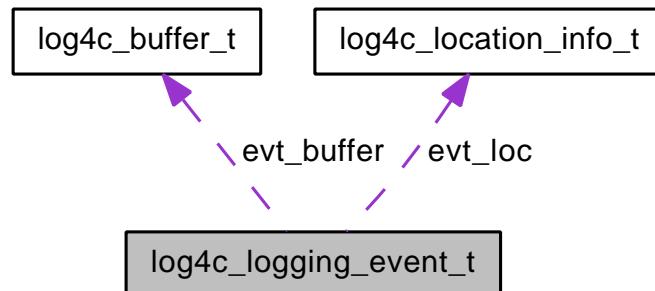

7.5.1 Detailed Description

logging event object Attributes description:

- evt_category category name.
- evt_priority priority of logging event.
- evt_msg The application supplied message of logging event.

- `evt_buffer` a pre allocated buffer to be used by layouts to format in a multi-thread environment.
- `evt_rendered_msg` The application supplied message after layout format.
- `evt_timestamp` The number of seconds elapsed since the epoch (1/1/1970 00:00:00 UTC) until logging event was created.
- `evt_loc` The event's location information

The documentation for this struct was generated from the following file:

- `logging_event.h`

7.6 log4c_rc_t Struct Reference

resource configuration object

```
#include <rc.h>
```

7.6.1 Detailed Description

resource configuration object Attributes description:

- `nocleanup` don't perform memory cleanup in log4c library destructor or in `log4c_fini()` (p.41)
- `bufsize` maximum logging buffer size. 0 for no limits
- `debug` activate log4c debugging

The documentation for this struct was generated from the following file:

- `rc.h`

7.7 log4c_rollingpolicy_type Struct Reference

log4c rollingpolicy type. Defines the interface a specific policy must provide to the rollingfile appender.

```
#include <rollingpolicy.h>
```

7.7.1 Detailed Description

log4c rollingpolicy type. Defines the interface a specific policy must provide to the rollingfile appender. Attributes description:

- `name` rollingpolicy type name

- `init()` init the rollingpolicy
- `is_triggering_event()`
- `rollover()`

The documentation for this struct was generated from the following file:

- `rollingpolicy.h`


8 File Documentation

8.1 appender.h File Reference

Implement this interface for your own strategies for printing log statements.

```
#include <log4c/defs.h>
#include <log4c/layout.h>
#include <stdio.h>
```

Include dependency graph for appender.h:

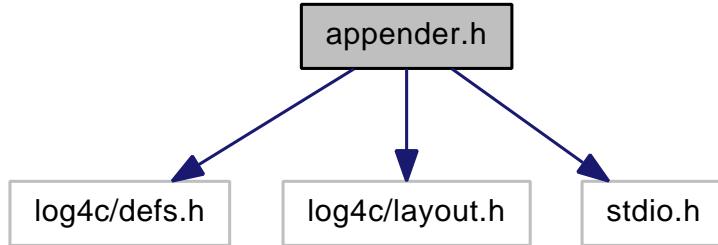

Data Structures

- struct `log4c_appender_type`
log4c appender type class

Defines

- `#define log4c_appender_type_define(a_type)`

TypeDefs

- `typedef struct __log4c_appender log4c_appender_t`
- `typedef struct log4c_appender_type log4c_appender_type_t`

log4c appender type class

Functions

- LOG4C_API const **log4c_appender_type_t*** **log4c_appender_type_get**(const char *a_name)
- LOG4C_API const **log4c_appender_type_t*** **log4c_appender_type_set**(const **log4c_appender_type_t***a_type)
- LOG4C_API **log4c_appender_t*** **log4c_appender_get**(const char *a_name)
- LOG4C_API **log4c_appender_t*** **log4c_appender_new**(const char *a_name)
- LOG4C_API void **log4c_appender_delete**(**log4c_appender_t***a_appender)
- LOG4C_API const char * **log4c_appender_get_name**(const **log4c_appender_t***a_appender)
- LOG4C_API const **log4c_appender_type_t*** **log4c_appender_get_type**(const **log4c_appender_t***a_appender)
- LOG4C_API const **log4c_layout_t*** **log4c_appender_get_layout**(const **log4c_appender_t***a_appender)
- LOG4C_API void * **log4c_appender_get_udata**(const **log4c_appender_t***a_appender)
- LOG4C_API const **log4c_appender_type_t*** **log4c_appender_set_type**(**log4c_appender_t***a_appender, const **log4c_appender_type_t***a_type)
- LOG4C_API void * **log4c_appender_set_udata**(**log4c_appender_t***a_appender, void *a_udata)
- LOG4C_API const **log4c_layout_t*** **log4c_appender_set_layout**(**log4c_appender_t***a_appender, const **log4c_layout_t***a_layout)
- LOG4C_API int **log4c_appender_open**(**log4c_appender_t***a_appender)
- LOG4C_API int **log4c_appender_append**(**log4c_appender_t***a_appender, **log4c_logging_event_t***a_event)
- LOG4C_API int **log4c_appender_close**(**log4c_appender_t***a_appender)
- LOG4C_API void **log4c_appender_print**(const **log4c_appender_t***a_appender, FILE *a_stream)
- LOG4C_API void **log4c_appender_types_print**(FILE *fp)

8.1.1 Detailed Description

Implement this interface for your own strategies for printing log statements.

Todo

the appender interface needs a better configuration system depending on the layout type. The udata field is a just a trick.

8.1.2 Define Documentation

8.1.2.1 #define **log4c_appender_type_define(a_type)**

Helper macro to define static appender types.

Parameters

<i>a_type</i>	the log4c_appender_type_t object to define
---------------	--

Warning

needs GCC support: otherwise this macro does nothing

Deprecated

This macro, and the static initialization of appenders in general, is deprecated. Use rather the **log4c_appender_type_set()** (p. 17) function to initialize your appenders before calling **log4c_init()** (p. 42)

8.1.3 Typedef Documentation**8.1.3.1 typedef struct __log4c_appender log4c_appender_t**

log4c appender class

8.1.3.2 typedef struct log4c_appender_type log4c_appender_type_t

log4c appender type class

Attributes description:

- name appender type name
- open
- append
- close

8.1.4 Function Documentation**8.1.4.1 LOG4C_API int log4c_appender_append (log4c_appender_t * *this*,
log4c_logging_event_t * *a_event*)**

log in appender specific way.

Parameters

<i>a_appender</i>	the log4c_appender object
<i>a_event</i>	the log4c_logging_event_t (p. 9) object to log.

Bug

is this the right place to open an appender ?

**8.1.4.2 LOG4C_API int log4c_appender_close (log4c_appender_t *
 a_appender)**

closes the appender

Parameters

<i>a_appender</i>	the log4c_appender_t object
-------------------	-----------------------------

Returns

zero if successful, -1 otherwise

**8.1.4.3 LOG4C_API void log4c_appender_delete (log4c_appender_t *
 a_appender)**

Destructor for log4c_appender_t.

**8.1.4.4 LOG4C_API log4c_appender_t* log4c_appender_get (const char *
 a_name)**

Get a pointer to an existing appender.

Parameters

<i>a_name</i>	the name of the appender to return.
---------------	-------------------------------------

Returns

a pointer to an existing appender, or NULL if no appender with the specified name exists.

**8.1.4.5 LOG4C_API const log4c_layout_t* log4c_appender_get_layout (const
 log4c_appender_t * *a_appender*)**

Parameters

<i>a_appender</i>	the log4c_appender_t object
-------------------	-----------------------------

Returns

the appender layout

8.1.4.6 LOG4C_API const char* log4c_appender_get_name (const log4c_appender_t * *a_appender*)

Parameters

<i>a_appender</i>	the log4c_appender_t object
-------------------	-----------------------------

Returns

the appender name

8.1.4.7 LOG4C_API const log4c_appender_type_t* log4c_appender_get_type (const log4c_appender_t * *a_appender*)

Parameters

<i>a_appender</i>	the log4c_appender_t object
-------------------	-----------------------------

Returns

the appender operations

8.1.4.8 LOG4C_API void* log4c_appender_get_udata (const log4c_appender_t * *a_appender*)

Parameters

<i>a_appender</i>	the log4c_appender_t object
-------------------	-----------------------------

Returns

the appender user data

8.1.4.9 LOG4C_API log4c_appender_t* log4c_appender_new (const char * *a_name*)

Constructor for log4c_appender_t.

8.1.4.10 LOG4C_API int log4c_appender_open (log4c_appender_t * *a_appender*)

opens the appender.

Parameters

<i>a_appender</i>	the log4c_appender_t object
-------------------	-----------------------------

**8.1.4.11 LOG4C_API void log4c_appender_print (const log4c_appender_t *
a_appender, FILE * a_stream)**

prints the appender on a stream

Parameters

<i>a_appender</i>	the log4c_appender_t object
<i>a_stream</i>	the stream

8.1.4.12 LOG4C_API const log4c_layout_t* log4c_appender_set_layout (
log4c_appender_t * a_appender, const log4c_layout_t * a_layout)

sets the appender layout

Parameters

<i>a_appender</i>	the log4c_appender_t object
<i>a_layout</i>	the new appender layout

Returns

the previous appender layout

8.1.4.13 LOG4C_API const log4c_appender_type_t* log4c_appender_set_type
(log4c_appender_t * a_appender, const log4c_appender_type_t *
a_type)

sets the appender type

Parameters

<i>a_appender</i>	the log4c_appender_t object
<i>a_type</i>	the new appender type

Returns

the previous appender type

**8.1.4.14 LOG4C_API void* log4c_appender_set_udata (log4c_appender_t *
a_appender, void * a_udata)**

sets the appender user data

Parameters

<i>a_appender</i>	the log4c_appender_t object
<i>a_udata</i>	the new appender user data

Returns

the previous appender user data

**8.1.4.15 LOG4C_API const log4c_appender_type_t* log4c_appender_type_get
(const char * *a_name*)**

Get a pointer to an existing appender type.

Parameters

<i>a_name</i>	the name of the appender type to return.
---------------	--

Returns

a pointer to an existing appender type, or NULL if no appender type with the specified name exists.

**8.1.4.16 LOG4C_API const log4c_appender_type_t* log4c_appender_type_set
(const log4c_appender_type_t * *a_type*)**

Use this function to register an appender type with log4c. Once this is done you may refer to this type by name both programmatically and in the log4c configuration file.

Parameters

<i>a_type</i>	a pointer to the new appender type to set.
---------------	--

Returns

a pointer to the previous appender type of same name.

Example code fragment:

```
const log4c_appender_type_t log4c_appender_type_s13_file = {
    "s13_file",
    s13_file_open,
    s13_file_append,
    s13_file_close,
};

log4c_appender_type_set(&log4c_appender_type_s13_file);
```

8.1.4.17 LOG4C_API void log4c_appender_types_print(FILE * *fp*)

prints all the current registered appender types on a stream

Parameters


<i>fp</i>	the stream
-----------	------------

8.2 appender_type_mmap.h File Reference

Log4c mmap(2) appender interface.

```
#include <log4c/defs.h>
#include <log4c/appender.h>
```

Include dependency graph for appender_type_mmap.h:

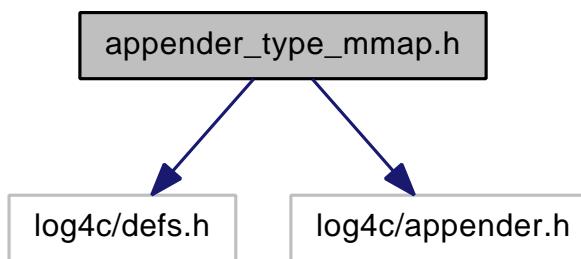**Variables**

- `_LOG4C_BEGIN_DECLS const log4c_appender_type_t log4c_appender_-
type_mmap`

8.2.1 Detailed Description

Log4c mmap(2) appender interface. The mmap appender uses a fixed length memory mapped file for logging. The appender's name is used as the file name which will be opened and mapped to memory at first use. The memory mapped file is then used as a rotating buffer in which logging events are written.

The following examples shows how to define and use mmap appenders.

```
log4c_appender_t* myappender;
myappender = log4c_appender_get( "myfile.log" );
log4c_appender_set_type(myappender, &log4c_appender_type_mmap);
```

Warning

the file is not created at first use. It should already exist and have a reasonable size, a multiple of a page size.

8.2.2 Variable Documentation

8.2.2.1 __LOG4C_BEGIN_DECLS const log4c_appender_type_t log4c_appender_type_mmap

Mmap appender type definition.


This should be used as a parameter to the **log4c_appender_set_type()** (p. 16) routine to set the type of the appender.

8.3 appender_type_rollingfile.h File Reference

Log4c rolling file appender interface.

```
#include <log4c/defs.h>
#include <log4c/appender.h>
#include <log4c/rollingpolicy.h>
```

Include dependency graph for appender_type_rollingfile.h:

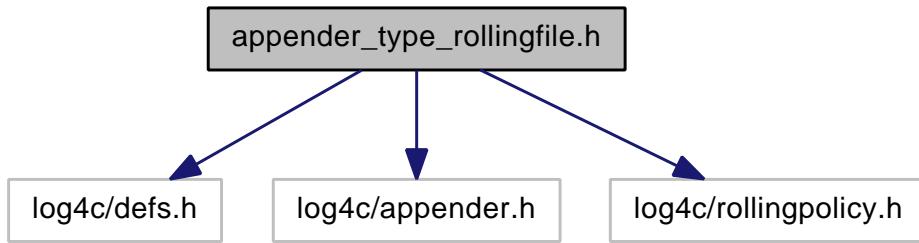

Functions

- LOG4C_API rollingfile_udata_t * **rollingfile_make_udata** (void)
- LOG4C_API int **rollingfile_udata_set_logdir** (rollingfile_udata_t *rfudatap, char *logdir)
- LOG4C_API int **rollingfile_udata_set_files_prefix** (rollingfile_udata_t *rfudatap, char *prefix)
- LOG4C_API int **rollingfile_udata_set_policy** (rollingfile_udata_t *rfudatap, **log4c_rollingpolicy_t** *policyp)
- LOG4C_API const char * **rollingfile_udata_get_logdir** (rollingfile_udata_t *rfudatap)
- LOG4C_API const char * **rollingfile_udata_get_files_prefix** (rollingfile_udata_t *rfudatap)
- LOG4C_API long **rollingfile_get_current_file_size** (rollingfile_udata_t *rfudatap)

Variables

- __LOG4C_BEGIN_DECLS LOG4C_API const **log4c_appender_type_t** **log4c_appender_type_rollingfile**

8.3.1 Detailed Description

Log4c rolling file appender interface. The rolling file appender implements a logging mechanism of a list of files up to a maximum number.

The files are written by default to the current directory with logging names following the pattern log.1, log.2 etc. These parameters may be changed using the appropriate setter functions.

If the appender fails to open logfiles for writing then the messages are logged to stderr--it will continue to try to open the zero-th file for writing at rollover events so if it succeeds at some point to open that file the messages will start to appear therein and will no longer be sent to stderr.

Switching from logging from one file to the next is referred to as a 'rollover event'.

The policy that determines when a rollover event should happen is called a 'rolling policy'.

A mechanism is provided to allow different rolling policies to be defined.

Log4c ships with (and defaults to) the classic size-window rollover policy: this triggers rollover when files reach a maximum size. The first file in the list is always the current file; when a rollover event occurs files are shifted up by one position in the list--if the number of files in the list has already reached the max then the oldest file is rotated out of the window.

See the documentation in the **rollingpolicy_type_sizewin.h** (p. 62) file for more details on the size-win rollover policy.

8.3.2 Function Documentation

8.3.2.1 LOG4C_API long rollingfile_get_current_file_size (**rollingfile_udata_t *rfudatap**)

Get the prefix string in this rolling file appender configuration.

Parameters

<i>rfudatap</i>	the rolling file appender configuration object.
-----------------	---

Returns

the current size of the file being logged to.

8.3.2.2 LOG4C_API **rollingfile_udata_t* rollingfile_make_udata (void)**

Get a new rolling file appender configuration object.

Returns

a new rolling file appender configuration object, otherwise NULL.

8.3.2.3 LOG4C_API const char* rollingfile_udata_get_files_prefix (rollingfile_udata_t * *rfudatap*)

Get the prefix string in this rolling file appender configuration.

Parameters

<i>rfudatap</i>	the rolling file appender configuration object.
-----------------	---

Returns

the prefix.

8.3.2.4 LOG4C_API const char* rollingfile_udata_get_logdir (rollingfile_udata_t * *rfudatap*)

Get the logging directory in this rolling file appender configuration.

Parameters

<i>rfudatap</i>	the rolling file appender configuration object.
-----------------	---

Returns

the logging directory.

8.3.2.5 LOG4C_API int rollingfile_udata_set_files_prefix (rollingfile_udata_t * *rfudatap*, char * *prefix*)

Set the prefix string in this rolling file appender configuration.

Parameters

<i>rfudatap</i>	the rolling file appender configuration object.
<i>prefix</i>	the logging files prfix to use.

Returns

zero if successful, non-zero otherwise.

8.3.2.6 LOG4C_API int rollingfile_udata_set_logdir (rollingfile_udata_t * *rfudatap*, char * *logdir*)

Set the logging directory in this rolling file appender configuration.

Parameters

<i>rfudatap</i>	the rolling file appender configuration object.
<i>logdir</i>	the logging directory to set.

Returns

zero if successful, non-zero otherwise.

**8.3.2.7 LOG4C_API int rollingfile_udata_set_policy (rollingfile_udata_t *
rfudatap, log4c_rollingpolicy_t *polcyp)**

Set the rolling policy in this rolling file appender configuration.

Parameters

<i>rfudatap</i>	the rolling file appender configuration object.
<i>polcyp</i>	the logging files prfix to use.

Returns

zero if successful, non-zero otherwise.

8.3.3 Variable Documentation
**8.3.3.1 __LOG4C_BEGIN_DECLS LOG4C_API const log4c_appender_type_t
log4c_appender_type_rollingfile**

rollingfile appender type definition.


This should be used as a parameter to the **log4c_appender_set_type()** (p. 16) routine to set the type of the appender.

8.4 appender_type_stream.h File Reference

Log4c stream appender interface.

```
#include <log4c/defs.h>
#include <log4c/appender.h>
```

Include dependency graph for appender_type_stream.h:

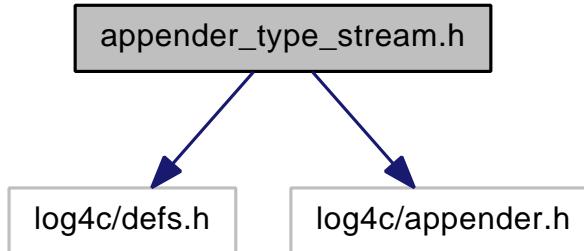

Variables

- `__LOG4C_BEGIN_DECLS const log4c_appender_type_t log4c_appender_type_stream`

8.4.1 Detailed Description

Log4c stream appender interface. The stream appender uses a file handle `FILE*` for logging. The appender's name is used as the file name which will be opened at first log. An appender can also be associated to an opened file handle using the `log4c_appender_set_udata()` (p. 16) method to update the appender user data field. In this last case, the appender name has no meaning. 2 default stream appenders are defined: "stdout" and "stderr".

The following examples shows how to define and use stream appenders.

- the simple way

```
log4c_appender_t* myappender;

myappender = log4c_appender_get( "myfile.log" );
log4c_appender_set_type(myappender, &log4c_appender_type_stream);
```

- the sophisticated way

```
log4c_appender_t* myappender;

myappender = log4c_appender_get( "myappender" );

log4c_appender_set_type(myappender, &log4c_appender_type_stream);
log4c_appender_set_udata(myappender, fopen("myfile.log", "w"));
```

8.4.2 Variable Documentation**8.4.2.1 __LOG4C_BEGIN_DECLS const log4c_appender_type_t
log4c_appender_type_stream**

Stream appender type definition.


This should be used as a parameter to the `log4c_appender_set_type()` (p. 16) routine to set the type of the appender.

8.5 appender_type_stream2.h File Reference

Log4c stream2 appender interface.

```
#include <log4c/defs.h>
#include <log4c/appender.h>
```

Include dependency graph for appender_type_stream2.h:

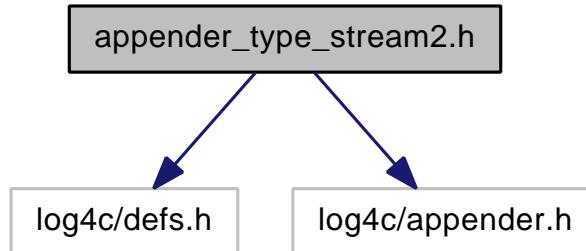

Functions

- LOG4C_API void **log4c_stream2_set_fp**(**log4c_appender_t***a_this, FILE *fp)
- LOG4C_API FILE * **log4c_stream2_get_fp**(**log4c_appender_t***a_this)
- LOG4C_API void **log4c_stream2_set_flags**(**log4c_appender_t***a_this, int flags)
- LOG4C_API int **log4c_stream2_get_flags**(**log4c_appender_t***a_this)

Variables

- __LOG4C_BEGIN_DECLS LOG4C_API const **log4c_appender_type_t**
log4c_appender_type_stream2

8.5.1 Detailed Description

Log4c stream2 appender interface. The stream2 appender uses a file handle `FILE*` for logging. It can be used with `stdout`, `stderr` or a normal file. It is pretty primitive as it does not do file rotation, or have a maximum configurable file size etc. It improves on the stream appender in a few ways that make it a better starting point for new stream based appenders.

It enhances the stream appender by allowing the default file pointer to be used in buffered or unbuffered mode. Also when you set the file pointer stream2 will not attempt to close it on exit which avoids it fighting with the owner of the file pointer. stream2 is configured via setter functions--the udata is not exposed directly. This means that new options (eg. configure the open mode) could be added to stream2 while maintaining backward compatibility.

The appender can be used with default values, for example as follows:

```

log4c_appender_t* myappender;
myappender = log4c_appender_get("/var/logs/mylog.log");
log4c_appender_set_type(myappender, log4c_appender_type_get("stream2"));
  
```

In this case the appender will be configured automatically with default values:

- the filename is the same as the name of the appender, "/var/logs/mylog.log"

- the file is opened in "w+" mode
- the default system buffer is used (cf; `setbuf()`) in buffered mode

The stream2 appender can be configured by passing it a file pointer to use. In this case you manage the file pointer yourself--open, option setting, closing. If you set the file pointer log4c will not close the file on exiting--you must do this:

```
log4c_appender_t* myappender;
FILE * fp = fopen("myfile.log", "w");

myappender = log4c_appender_get("myappender");
log4c_appender_set_type(myappender, log4c_appender_type_get("stream2"));
log4c_stream2_set_fp(stream2_appender, myfp);
```

The default file pointer can be configured to use unbuffered mode. Buffered mode is typically 25-50% faster than unbuffered mode but unbuffered mode is useful if your preference is for a more synchronized log file:

```
log4c_appender_t* myappender;

myappender = log4c_appender_get("/var/logs/mylog.log");
log4c_appender_set_type(myappender, log4c_appender_type_get("stream2"));
log4c_stream2_set_flags(myappender, LOG4C_STREAM2_UNBUFFERED);
```

8.5.2 Function Documentation

8.5.2.1 LOG4C_API int log4c_stream2_get_flags(log4c_appender_t * *a_this*)

Get the flags for this appender.

Parameters

<i>this</i>	a pointer to the appender
-------------	---------------------------

Returns

the flags for this appender. returns -1 if there was a problem.

8.5.2.2 LOG4C_API FILE* log4c_stream2_get_fp(log4c_appender_t * *a_this*)

Get the file pointer for this appender.

Parameters

<i>this</i>	a pointer to the appender
-------------	---------------------------

Returns

the file pointer for this appender. If there's a problem returns NULL.

8.5.2.3 LOG4C_API void log4c_stream2_set_flags(log4c_appender_t * a_this, int flags)

Set the flags for this appender.

Parameters

<i>this</i>	a pointer to the appender
<i>flags</i>	are the flags to set. These will overwrite the existing flags. Currently supported flags: LOG4C_STREAM2_UNBUFFERED

8.5.2.4 LOG4C_API void log4c_stream2_set_fp(log4c_appender_t * a_this, FILE *fp)

Set the file pointer for this appender.

Parameters

<i>this</i>	a pointer to the appender
<i>fp</i>	the file pointer this appender will use. The caller is responsible for managing the file pointer (open, option setting, closing).

8.5.3 Variable Documentation

8.5.3.1 __LOG4C_BEGIN_DECLS LOG4C_API const log4c_appender_type_t log4c_appender_type_stream2

Stream2 appender type definition.


This should be used as a parameter to the **log4c_appender_set_type()** (p. 16) routine to set the type of the appender.

8.6 appender_type_syslog.h File Reference

Log4c syslog(3) appender interface.

```
#include <log4c/defs.h>
#include <log4c/appender.h>
```

Include dependency graph for appender_type_syslog.h:

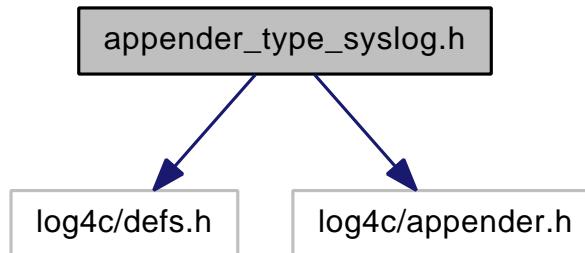

Variables

- `__LOG4C_BEGIN_DECLS const log4c_appender_type_t log4c_appender_type_syslog`

8.6.1 Detailed Description

Log4c syslog(3) appender interface. The syslog appender uses the syslog(3) interface for logging. The log4c priorities are mapped to the syslog priorities and the appender name is used as a syslog identifier. 1 default syslog appender is defined: "syslog".

The following examples shows how to define and use syslog appenders.

```

log4c_appender_t* myappender;
myappender = log4c_appender_get("myappender");
log4c_appender_set_type(myappender, &log4c_appender_type_syslog);
  
```

8.6.2 Variable Documentation

8.6.2.1 `__LOG4C_BEGIN_DECLS const log4c_appender_type_t log4c_appender_type_syslog`

Syslog appender type definition.


This should be used as a parameter to the `log4c_appender_set_type()` (p. 16) routine to set the type of the appender.

8.7 buffer.h File Reference

```

log4c buffer
#include <log4c/defs.h>
#include <stddef.h>
  
```

Include dependency graph for buffer.h:

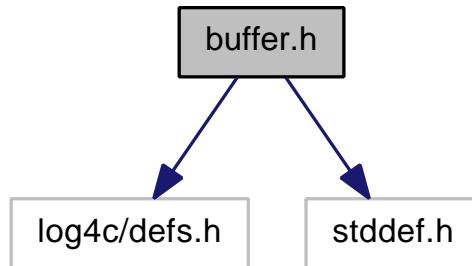

Data Structures

- struct **log4c_buffer_t**
buffer object

8.7.1 Detailed Description

log4c buffer


8.8 category.h File Reference

central class in the log4c package.

```

#include <stdio.h>
#include <stdarg.h>
#include <log4c/defs.h>
#include <log4c/priority.h>
#include <log4c/location_info.h>
  
```

Include dependency graph for category.h:

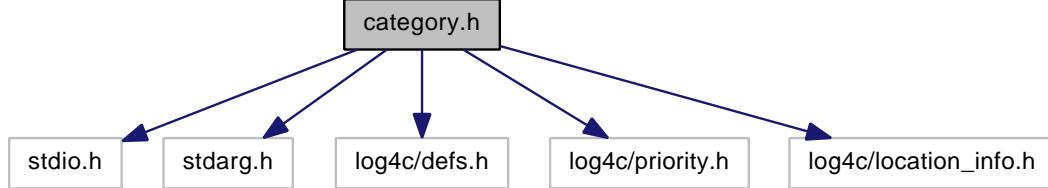

Defines

- #define **log4c_category_define**(a_category, a_name)

Typedefs

- `typedef struct __log4c_category log4c_category_t`

Functions

- `LOG4C_API log4c_category_t * log4c_category_get (const char *a_name)`
- `LOG4C_API int log4c_category_list (log4c_category_t **a_cats, int a_ncats)`
- `LOG4C_API log4c_category_t * log4c_category_new (const char *a_name)`
- `LOG4C_API void log4c_category_delete (log4c_category_t *a_category)`
- `LOG4C_API const char * log4c_category_get_name (const log4c_category_t *a_category)`
- `LOG4C_API struct __log4c_appender * log4c_category_get_appender (const log4c_category_t *a_category)`
- `LOG4C_API int log4c_category_get_additivity (const log4c_category_t *a_category)`
- `LOG4C_API int log4c_category_get_priority (const log4c_category_t *a_category)`
- `LOG4C_API int log4c_category_get_chainedpriority (const log4c_category_t *a_category)`
- `LOG4C_API struct __log4c_appender * log4c_category_set_appender (log4c_category_t *a_category, struct __log4c_appender *a_appender)`
- `LOG4C_API int log4c_category_set_priority (log4c_category_t *a_category, int a_priority)`
- `LOG4C_API int log4c_category_set_additivity (log4c_category_t *a_category, int a_additivity)`
- `LOG4C_API void log4c_category_print (const log4c_category_t *a_category, FILE *a_stream)`
- `static int log4c_category_is_priority_enabled (const log4c_category_t *a_category, int a_priority)`
- `static int log4c_category_is_fatal_enabled (const log4c_category_t *a_category)`
- `static int log4c_category_is_alert_enabled (const log4c_category_t *a_category)`
- `static int log4c_category_is_crit_enabled (const log4c_category_t *a_category)`
- `static int log4c_category_is_error_enabled (const log4c_category_t *a_category)`
- `static int log4c_category_is_warn_enabled (const log4c_category_t *a_category)`
- `static int log4c_category_is_notice_enabled (const log4c_category_t *a_category)`
- `static int log4c_category_is_info_enabled (const log4c_category_t *a_category)`
- `static int log4c_category_is_debug_enabled (const log4c_category_t *a_category)`
- `static int log4c_category_is_trace_enabled (const log4c_category_t *a_category)`
- `static LOG4C_INLINE void log4c_category_log (const log4c_category_t *a_category, int a_priority, const char *a_format,...)`
- `static LOG4C_INLINE void log4c_category_log_locinfo (const log4c_category_t *a_category, const log4c_location_info_t *a_locinfo, int a_priority, const char *a_format,...)`
- `static LOG4C_INLINE void log4c_category_fatal (const log4c_category_t *a_category, const char *a_format,...)`
- `static LOG4C_INLINE void log4c_category_alert (const log4c_category_t *a_category, const char *a_format,...)`

- static LOG4C_INLINE void **log4c_category_crit**(const **log4c_category_t****a_category*, const char **a_format*,...)
- static LOG4C_INLINE void **log4c_category_error**(const **log4c_category_t****a_category*, const char **a_format*,...)
- static LOG4C_INLINE void **log4c_category_warn**(const **log4c_category_t****a_category*, const char **a_format*,...)
- static LOG4C_INLINE void **log4c_category_notice**(const **log4c_category_t****a_category*, const char **a_format*,...)
- static LOG4C_INLINE void **log4c_category_info**(const **log4c_category_t****a_category*, const char **a_format*,...)
- static LOG4C_INLINE void **log4c_category_debug**(const **log4c_category_t****a_category*, const char **a_format*,...)
- static LOG4C_INLINE void **_log4c_category_trace**(const **log4c_category_t****a_category*, const char **a_format*,...)

8.8.1 Detailed Description

central class in the log4c package. One of the distinctive features of log4j (and hence log4c) are hierarchical categories and their evaluation.

8.8.2 Define Documentation

8.8.2.1 #define **log4c_category_define(*a_category*, *a_name*)**

Helper macro to define static categories.

Parameters

<i>a_category</i>	the log4c_category_t pointer name
<i>a_name</i>	the category name

8.8.3 Typedef Documentation

8.8.3.1 **typedef struct __log4c_category log4c_category_t**

log4c category class

8.8.4 Function Documentation

8.8.4.1 static LOG4C_INLINE void **_log4c_category_trace(const log4c_category_t **a_category*, const char **a_format*, ...) [static]**

Log a message with trace priority.

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for <i>a_format</i>

References `log4c_category_is_priority_enabled()`, and `LOG4C_PRIORITY_TRACE`.

8.8.4.2 static LOG4C_INLINE void log4c_category_alert(const log4c_category_t * *a_category*, const char * *a_format*, ...) [static]

Log a message with alert priority.

Parameters

<i>a_category</i>	the <code>log4c_category_t</code> object
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for <i>a_format</i>

References `log4c_category_is_priority_enabled()`, and `LOG4C_PRIORITY_ALERT`.

8.8.4.3 static LOG4C_INLINE void log4c_category_crit(const log4c_category_t * *a_category*, const char * *a_format*, ...) [static]

Log a message with crit priority.

Parameters

<i>a_category</i>	the <code>log4c_category_t</code> object
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for <i>a_format</i>

References `log4c_category_is_priority_enabled()`, and `LOG4C_PRIORITY_CRIT`.

8.8.4.4 static LOG4C_INLINE void log4c_category_debug(const log4c_category_t * *a_category*, const char * *a_format*, ...) [static]

Log a message with debug priority.

Parameters

<i>a_category</i>	the <code>log4c_category_t</code> object
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for <i>a_format</i>

References `log4c_category_is_priority_enabled()`, and `LOG4C_PRIORITY_DEBUG`.

**8.8.4.5 LOG4C_API void log4c_category_delete(log4c_category_t *
a_category)**

Destructor for a log4c_category_t.

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

**8.8.4.6 static LOG4C_INLINE void log4c_category_error(const
log4c_category_t * a_category, const char * a_format, ...) [static]**

Log a message with error priority.

Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for a_format

References log4c_category_is_priority_enabled(), and LOG4C_PRIORITY_ERROR.

**8.8.4.7 static LOG4C_INLINE void log4c_category_fatal(const
log4c_category_t * a_category, const char * a_format, ...) [static]**

Log a message with fatal priority.

Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for a_format

References log4c_category_is_priority_enabled(), and LOG4C_PRIORITY_FATAL.

**8.8.4.8 LOG4C_API log4c_category_t* log4c_category_get(const char *
a_name)**

Instantiate a log4c_category_t with name *name*. This method does not set priority of the category which is by default LOG4C_PRIORITY_NOTSET.

Parameters

<i>a_name</i>	The name of the category to retrieve.
---------------	---------------------------------------

Bug

the root category name should be "" not "root". *

8.8.4.9 LOG4C_API int log4c_category_get_additivity(const log4c_category_t * a_category)

Get the additivity flag for this log4c_category_t..

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

Returns

the category additivity

8.8.4.10 LOG4C_API struct __log4c_appender* log4c_category_get_appender(const log4c_category_t * a_category) [read]

Returns the Appender for this log4c_category_t, or NULL if no Appender has been set.

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

Returns

The Appender.

8.8.4.11 LOG4C_API int log4c_category_get_chainedpriority(const log4c_category_t * a_category)

Starting from this category, search the category hierarchy for a set priority and return it. Otherwise, return the priority of the root category.

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

Todo

the log4c_category_t is designed so that this method executes as quickly as possible. It could even be faster if the set priority was propagated through the children hierarchy of a category.

References LOG4C_PRIORITY_NOTSET, and LOG4C_PRIORITY_UNKNOWN.

8.8.4.12 LOG4C_API const char* log4c_category_get_name(const log4c_category_t * a_category)

Return the category name.

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

Returns

the category name.

8.8.4.13 LOG4C_API int log4c_category_get_priority(const log4c_category_t * *a_category*)

Returns the assigned Priority, if any, for this log4c_category_t.

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

Returns

Priority - the assigned Priority, can be LOG4C_PRIORITY_NOTSET

References LOG4C_PRIORITY_UNKNOWN.

8.8.4.14 static LOG4C_INLINE void log4c_category_info(const log4c_category_t * *a_category*, const char * *a_format*, ...) [static]

Log a message with info priority.

Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for <i>a_format</i>

References log4c_category_is_priority_enabled(), and LOG4C_PRIORITY_INFO.

8.8.4.15 static int log4c_category_is_alert_enabled(const log4c_category_t * *a_category*) [inline, static]

Return true if the category will log messages with priority LOG4C_PRIORITY_ALERT.

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

Returns

Whether the category will log.

References log4c_category_is_priority_enabled(), and LOG4C_PRIORITY_ALERT.

**8.8.4.16 static int log4c_category_is_crit_enabled(const log4c_category_t *
a_category) [inline, static]**

Return true if the category will log messages with priority
LOG4C_PRIORITY_CRIT.

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

Returns

Whether the category will log.

References log4c_category_is_priority_enabled(), and LOG4C_PRIORITY_CRIT.

**8.8.4.17 static int log4c_category_is_debug_enabled(const log4c_category_t *
a_category) [inline, static]**

Return true if the category will log messages with priority
LOG4C_PRIORITY_DEBUG.

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

Returns

Whether the category will log.

References log4c_category_is_priority_enabled(), and LOG4C_PRIORITY_DEBUG.

**8.8.4.18 static int log4c_category_is_error_enabled(const log4c_category_t *
a_category) [inline, static]**

Return true if the category will log messages with priority
LOG4C_PRIORITY_ERROR.

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

Returns

Whether the category will log.

References log4c_category_is_priority_enabled(), and LOG4C_PRIORITY_ERROR.

**8.8.4.19 static int log4c_category_is_fatal_enabled(const log4c_category_t *
a_category) [inline, static]**

Return true if the category will log messages with priority LOG4C_PRIORITY_FATAL.

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

Returns

Whether the category will log.

References log4c_category_is_priority_enabled(), and LOG4C_PRIORITY_FATAL.

**8.8.4.20 static int log4c_category_is_info_enabled(const log4c_category_t *
a_category) [inline, static]**

Return true if the category will log messages with priority LOG4C_PRIORITY_INFO.

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

Returns

Whether the category will log.

References log4c_category_is_priority_enabled(), and LOG4C_PRIORITY_INFO.

**8.8.4.21 static int log4c_category_is_notice_enabled(const log4c_category_t *
a_category) [inline, static]**

Return true if the category will log messages with priority LOG4C_PRIORITY_NOTICE.

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

Returns

Whether the category will log.

References log4c_category_is_priority_enabled(), and LOG4C_PRIORITY_NOTICE.

8.8.4.22 static int log4c_category_is_priority_enabled(const log4c_category_t * *a_category*, int *a_priority*) [inline, static]

Returns true if the chained priority of the log4c_category_t is equal to or higher than given priority.

Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_priority</i>	The priority to compare with.

Returns

whether logging is enable for this priority.

8.8.4.23 static int log4c_category_is_trace_enabled(const log4c_category_t * *a_category*) [inline, static]

Return true if the category will log messages with priority LOG4C_PRIORITY_TRACE.

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

Returns

Whether the category will log.

References log4c_category_is_priority_enabled(), and LOG4C_PRIORITY_TRACE.

8.8.4.24 static int log4c_category_is_warn_enabled(const log4c_category_t * *a_category*) [inline, static]

Return true if the category will log messages with priority LOG4C_PRIORITY_WARN.

Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

Returns

Whether the category will log.

References log4c_category_is_priority_enabled(), and LOG4C_PRIORITY_WARN.

8.8.4.25 LOG4C_API int log4c_category_list(log4c_category_t *a_cats*, int *a_ncats*)**

Fill in an array with the log4c categories.

Parameters

<i>a_cats</i>	array of categories that will be filled
<i>a_ncats</i>	number of categories in the array

Returns

-1 if it fails or the number of available categories in log4c.

8.8.4.26 static LOG4C_INLINE void log4c_category_log(const log4c_category_t **a_category*, int *a_priority*, const char **a_format*, ...) [static]

Log a message with the specified priority.

Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_priority</i>	The priority of this log message.
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for <i>a_format</i>

References log4c_category_is_priority_enabled().

8.8.4.27 static LOG4C_INLINE void log4c_category_log_locinfo(const log4c_category_t **a_category*, const log4c_location_info_t **a_locinfo*, int *a_priority*, const char **a_format*, ...) [static]

Log a message with the specified priority and a user location info.

Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_locinfo</i>	a user location info
<i>a_priority</i>	The priority of this log message.
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for <i>a_format</i>

References log4c_category_is_priority_enabled().

8.8.4.28 LOG4C_API log4c_category_t* log4c_category_new (const char * *a_name*)

Constructor for a log4c_category_t.

Parameters

<i>a_name</i>	the category name
---------------	-------------------

Returns

a log4c_category object

Warning

this method should not be called directly. You should use the **log4c_category - get()** (p. 32) method in order to preserve the categories hierarchy.

References LOG4C_PRIORITY_NOTSET.

8.8.4.29 static LOG4C_INLINE void log4c_category_notice (const log4c_category_t * *a_category*, const char * *a_format*, ...) [static]

Log a message with notice priority.

Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for <i>a_format</i>

References log4c_category_is_priority_enabled(), and LOG4C_PRIORITY_NOTICE.

8.8.4.30 LOG4C_API void log4c_category_print (const log4c_category_t * *a_category*, FILE * *a_stream*)

prints the log4c_category_t object on a stream

Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_stream</i>	The stream

8.8.4.31 LOG4C_API int log4c_category_set_additivity (log4c_category_t * *a_category*, int *a_additivity*)

Sets a new additivity flag for this category.

Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_additivity</i>	the new category additivity

Returns

the previous category additivity

8.8.4.32 LOG4C_API struct __log4c_appender* log4c_category_set_appender (log4c_category_t * *this*, log4c_appender_t * *a_appender*) [read]

Sets a new appender for this category.

Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_appender</i>	the new category appender

Returns

the previous category appender

Todo

need multiple appenders per category

8.8.4.33 LOG4C_API int log4c_category_set_priority (log4c_category_t * *a_category*, int *a_priority*)

Sets a new priority of this category.

Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_priority</i>	the new priority to set. Use LOG4C_PRIORITY_NOTSET to let the category use its parents priority as effective priority.

Returns

the previous category priority

References LOG4C_PRIORITY_UNKNOWN.

8.8.4.34 static LOG4C_INLINE void log4c_category_warn (const log4c_category_t * *a_category*, const char * *a_format*, ...) [static]

Log a message with warn priority.

Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for <i>a_format</i>

References log4c_category_is_priority_enabled(), and LOG4C_PRIORITY_WARN.


8.9 init.h File Reference

log4c constructors and destructors

```
#include <log4c/defs.h>
```

```
#include <stdio.h>
```

Include dependency graph for init.h:

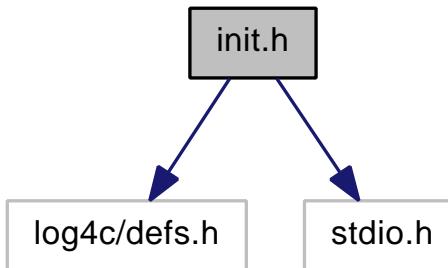**Functions**

- LOG4C_API int **log4c_init** (void)
- LOG4C_API int **log4c_fini** (void)

8.9.1 Detailed Description

log4c constructors and destructors

8.9.2 Function Documentation**8.9.2.1 LOG4C_API int log4c_fini (void)**

destructor

Returns

0 for success

References log4c_rc.

8.9.2.2 LOG4C_API int log4c_init(void)

constructor

Returns


0 for success

8.10 layout.h File Reference

Interface for user specific layout format of log4c_logging_event events.

```
#include <log4c/defs.h>
#include <log4c/logging_event.h>
#include <stdio.h>
```

Include dependency graph for layout.h:

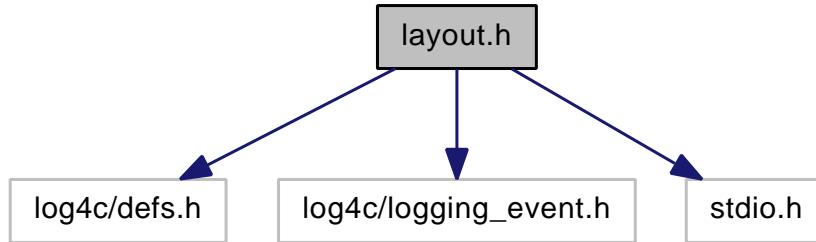

Data Structures

- struct **log4c_layout_type**

log4c layout type class

Defines

- #define **log4c_layout_type_define(a_type)**

Typedefs

- typedef struct __log4c_layout **log4c_layout_t**
- typedef struct **log4c_layout_type** **log4c_layout_type_t**

log4c layout type class

Functions

- LOG4C_API const **log4c_layout_type_t** * **log4c_layout_type_get** (const char *a_name)
- LOG4C_API const **log4c_layout_type_t** * **log4c_layout_type_set** (const **log4c_layout_type_t** *a_type)
- LOG4C_API **log4c_layout_t** * **log4c_layout_get** (const char *a_name)
- LOG4C_API **log4c_layout_t** * **log4c_layout_new** (const char *a_name)
- LOG4C_API void **log4c_layout_delete** (**log4c_layout_t** *a_layout)
- LOG4C_API const char * **log4c_layout_get_name** (const **log4c_layout_t** *a_layout)
- LOG4C_API const **log4c_layout_type_t** * **log4c_layout_get_type** (const **log4c_layout_t** *a_layout)
- LOG4C_API const **log4c_layout_type_t** * **log4c_layout_set_type** (**log4c_layout_t** *a_layout, const **log4c_layout_type_t** *a_type)
- LOG4C_API void * **log4c_layout_get_udata** (const **log4c_layout_t** *a_layout)
- LOG4C_API void * **log4c_layout_set_udata** (**log4c_layout_t** *a_layout, void *a_udata)
- LOG4C_API const char * **log4c_layout_format** (const **log4c_layout_t** *a_layout, const **log4c_logging_event_t** *a_event)
- LOG4C_API void **log4c_layout_print** (const **log4c_layout_t** *a_layout, FILE *a_stream)
- LOG4C_API void **log4c_layout_types_print** (FILE *fp)

8.10.1 Detailed Description

Interface for user specific layout format of log4c_logging_event events.

Todo

the layout interface needs a better configuration system depending on the layout type. The udata field is a just a trick.

Todo

a pattern layout would be welcomed !!

8.10.2 Define Documentation

8.10.2.1 **#define log4c_layout_type_define(a_type)**

Helper macro to define static layout types.

Parameters

<i>a_type</i>	the log4c_layout_type_t object to define
---------------	---

Warning

needs GCC support: otherwise this macro does nothing

Deprecated

This macro, and the static initialization of layouts in general, is deprecated. Use rather the `log4c_layout_type_set()` (p. 47) function to initialize your appenders before calling `log4c_init()` (p. 42)

8.10.3 Typedef Documentation**8.10.3.1 `typedef struct __log4c_layout log4c_layout_t`**

log4c layout class

8.10.3.2 `typedef struct log4c_layout_type log4c_layout_type_t`

log4c layout type class

Attributes description:

- name layout type name
- format

8.10.4 Function Documentation**8.10.4.1 `LOG4C_API void log4c_layout_delete(log4c_layout_t * a_layout)`**

Destructor for layout.

8.10.4.2 `LOG4C_API const char* log4c_layout_format(const log4c_layout_t * a_layout, const log4c_logging_event_t * a_event)`

format a `log4c_logging_event` events to a string.

Parameters

<code>a_layout</code>	the <code>log4c_layout_t</code> object
<code>a_event</code>	a <code>logging_event_t</code> object

Returns

an appendable string.

8.10.4.3 LOG4C_API log4c_layout_t* log4c_layout_get(const char * *a_name*)

Get a pointer to an existing layout.

Parameters

<i>a_name</i>	the name of the layout to return.
---------------	-----------------------------------

Returns

a pointer to an existing layout, or NULL if no layout with the specified name exists.

8.10.4.4 LOG4C_API const char* log4c_layout_get_name(const log4c_layout_t * *a_layout*)

Parameters

<i>a_layout</i>	the log4c_layout_t object
-----------------	---------------------------

Returns

the layout name

8.10.4.5 LOG4C_API const log4c_layout_type_t* log4c_layout_get_type(const log4c_layout_t * *a_layout*)

Parameters

<i>a_layout</i>	the log4c_layout_t object
-----------------	---------------------------

Returns

a log4c_layout_type_t object

8.10.4.6 LOG4C_API void* log4c_layout_get_udata(const log4c_layout_t * *a_layout*)

Parameters

<i>a_layout</i>	the log4c_layout_t object
-----------------	---------------------------

Returns

the layout user data

8.10.4.7 LOG4C_API log4c_layout_t* log4c_layout_new (const char * *a_name*)

Constructor for layout.

8.10.4.8 LOG4C_API void log4c_layout_print (const log4c_layout_t * *a_layout*, FILE * *a_stream*)

prints the layout on a stream

Parameters

<i>a_layout</i>	the log4c_layout_t object
<i>a_stream</i>	the stream

8.10.4.9 LOG4C_API const log4c_layout_type_t* log4c_layout_set_type (log4c_layout_t * *a_layout*, const log4c_layout_type_t * *a_type*)

sets the layout type

Parameters

<i>a_layout</i>	the log4c_layout_t object
<i>a_type</i>	the new layout type

Returns

the previous layout type

8.10.4.10 LOG4C_API void* log4c_layout_set_udata (log4c_layout_t * *a_layout*, void * *a_udata*)

sets the layout user data

Parameters

<i>a_layout</i>	the log4c_layout_t object
<i>a_udata</i>	the new layout user data

Returns

the previous layout user data

8.10.4.11 LOG4C_API const log4c_layout_type_t* log4c_layout_type_get (const char * *a_name*)

Get a pointer to an existing layout type.

Parameters

<i>a_name</i>	the name of the layout type to return.
---------------	--

Returns

a pointer to an existing layout type, or NULL if no layout type with the specified name exists.

8.10.4.12 LOG4C_API const log4c_layout_type_t* log4c_layout_type_set (const log4c_layout_type_t * *a_type*)

Use this function to register a layout type with log4c. Once this is done you may refer to this type by name both programatically and in the log4c configuration file.

Parameters

<i>a_type</i>	a pointer to the new layout type to set.
---------------	--

Returns

a pointer to the previous layout type of same name.

Example code fragment:

```
const log4c_layout_type_t log4c_layout_type_xml = {
    "s13_xml",
    xml_format,
};

log4c_layout_type_set(&log4c_layout_type_xml);
```

8.10.4.13 LOG4C_API void log4c_layout_types_print (FILE * *fp*)

prints all the current registered layout types on a stream

Parameters


<i>fp</i>	the stream
-----------	------------

8.11 layout_type_basic.h File Reference

Implement a basic layout.

```
#include <log4c/defs.h>
#include <log4c/layout.h>
```

Include dependency graph for layout_type_basic.h:

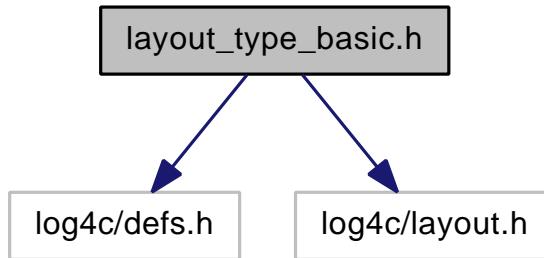

8.11.1 Detailed Description

Implement a basic layout. In `log4j.PatternLayout` conventions, the basic layout has the following conversion pattern: "%P %c - %m\n".

Where


- "%P" is the priority of the logging event
- "%c" is the category of the logging event
- "%m" is the application supplied message associated with the logging event

8.12 layout_type_basic_r.h File Reference

Implement a basic_r layout.

```
#include <log4c/defs.h>
#include <log4c/layout.h>
```

Include dependency graph for layout_type_basic_r.h:

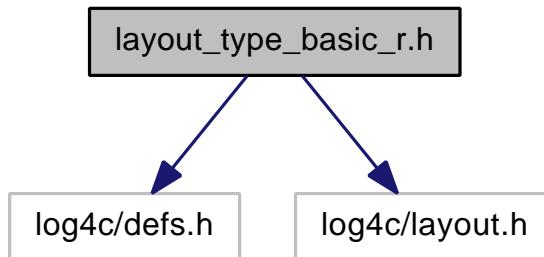

8.12.1 Detailed Description

Implement a basic_r layout. In `log4j.PatternLayout` conventions, the basic_r layout has the following conversion pattern: "%P %c - %m\n".

Where


- "%P" is the priority of the logging event
- "%c" is the category of the logging event
- "%m" is the application supplied message associated with the logging event

8.13 layout_type_dated.h File Reference

Implement a dated layout.

```
#include <log4c/defs.h>
#include <log4c/layout.h>
```

Include dependency graph for layout_type_dated.h:

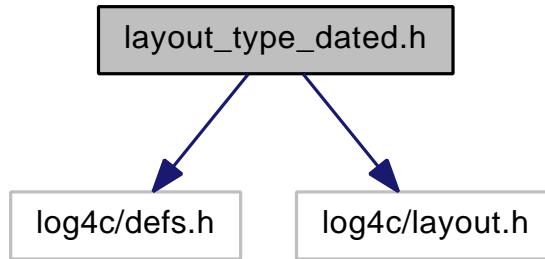

8.13.1 Detailed Description

Implement a dated layout. In `log4j.PatternLayout` conventions, the dated layout has the following conversion pattern: "%d %P %c - %m\n".

Where


- "%d" is the date of the logging event
- "%P" is the priority of the logging event
- "%c" is the category of the logging event
- "%m" is the application supplied message associated with the logging event

8.14 layout_type_dated_r.h File Reference

Implement a dated_r layout.

```
#include <log4c/defs.h>
#include <log4c/layout.h>
```

Include dependency graph for layout_type_dated_r.h:

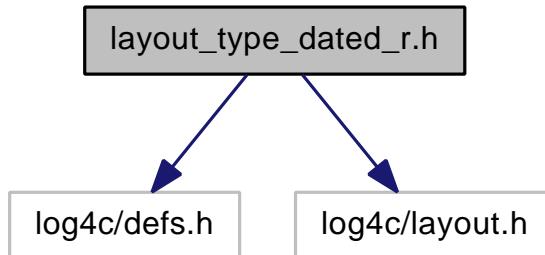

8.14.1 Detailed Description

Implement a dated_r layout. In `log4j.PatternLayout` conventions, the dated_r layout has the following conversion pattern: "%d %P %c - %m\n".

Where


- "%d" is the date of the logging event
- "%P" is the priority of the logging event
- "%c" is the category of the logging event
- "%m" is the application supplied message associated with the logging event

8.15 location_info.h File Reference

The internal representation of caller location information.

```
#include <log4c/defs.h>
```

Include dependency graph for location_info.h:



Data Structures

- struct **log4c_location_info_t**
logging location information

Defines

- #define **LOG4C_LOCATION_INFO_INITIALIZER**(user_data) { __FILE__, __LINE__, "(nil)", user_data }
- #define **log4c_location** __log4c_location(__LINE__)

8.15.1 Detailed Description

The internal representation of caller location information. When a affirmative logging decision is made a **log4c_location_info_t** (p. 8) is created and is passed around the different log4c components.

8.15.2 Define Documentation

8.15.2.1 #define log4c_location __log4c_location(__LINE__)

This macro returns the literal representation of a logging event location

8.15.2.2 #define LOG4C_LOCATION_INFO_INITIALIZER(*user_data*) { *FILE*__, *LINE*__, "(nil)", *user_data* }


log4c_location_info_t (p. 8) initializer

8.16 logging_event.h File Reference

the internal representation of logging events.

```
#include <log4c/defs.h>
#include <log4c/buffer.h>
#include <log4c/location_info.h>
#include <sys/time.h>
```

Include dependency graph for logging_event.h:

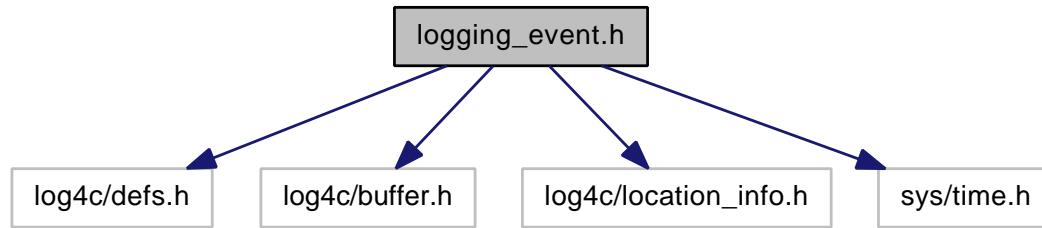

Data Structures

- struct **log4c_logging_event_t**
logging event object

Functions

- LOG4C_API **log4c_logging_event_t * log4c_logging_event_new** (const char *a_category, int a_priority, const char *a_message)
- LOG4C_API void **log4c_logging_event_delete**(**log4c_logging_event_t***a_event)

8.16.1 Detailed Description

the internal representation of logging events. When a affirmative logging decision is made a log4c_logging_event instance is created. This instance is passed around the different log4c components.

8.16.2 Function Documentation

8.16.2.1 LOG4C_API void log4c_logging_event_delete(log4c_logging_event_t * *a_event*)

Destructor for a logging event.

Parameters

<i>a_event</i>	the logging event object
----------------	--------------------------

8.16.2.2 LOG4C_API log4c_logging_event_t* log4c_logging_event_new(const char * *a_category*, int *a_priority*, const char * *a_message*)

Constructor for a logging event.

Parameters

<i>a_category</i>	the category name
<i>a_priority</i>	the category initial priority
<i>a_message</i>	the message of this event

Todo


need to handle multi-threading (NDC)

8.17 priority.h File Reference

The priority class provides importance levels with which one can categorize log messages.

```
#include <log4c/defs.h>
```

Include dependency graph for priority.h:

**Enumerations**

- enum **log4c_priority_level_t** {

 LOG4C_PRIORITY_FATAL = 000,

 LOG4C_PRIORITY_ALERT = 100,

 LOG4C_PRIORITY_CRIT = 200,

 LOG4C_PRIORITY_ERROR = 300,
 }

```
LOG4C_PRIORITY_WARN = 400,  
LOG4C_PRIORITY_NOTICE = 500,  
LOG4C_PRIORITY_INFO = 600,  
LOG4C_PRIORITY_DEBUG = 700,  
LOG4C_PRIORITY_TRACE = 800,  
LOG4C_PRIORITY_NOTSET = 900,  
LOG4C_PRIORITY_UNKNOWN = 1000 }
```

Functions

- LOG4C_API const char * **log4c_priority_to_string** (int a_priority)
- LOG4C_API int **log4c_priority_to_int** (const char *a_priority_name)

8.17.1 Detailed Description

The priority class provides importance levels with which one can categorize log messages.

8.17.2 Enumeration Type Documentation

8.17.2.1 enum log4c_priority_level_t

Predefined Levels of priorities. These correspond to the priority levels used by syslog(3).

Enumerator:

```
LOG4C_PRIORITY_FATAL fatal  
LOG4C_PRIORITY_ALERT alert  
LOG4C_PRIORITY_CRIT crit  
LOG4C_PRIORITY_ERROR error  
LOG4C_PRIORITY_WARN warn  
LOG4C_PRIORITY_NOTICE notice  
LOG4C_PRIORITY_INFO info  
LOG4C_PRIORITY_DEBUG debug  
LOG4C_PRIORITY_TRACE trace  
LOG4C_PRIORITY_NOTSET notset  
LOG4C_PRIORITY_UNKNOWN unknown
```

8.17.3 Function Documentation

8.17.3.1 LOG4C_API int log4c_priority_to_int (const char * *a_priority_name*)

Parameters

<i>a_priority_name</i>	a priority string name.
------------------------	-------------------------

Returns

the given numeric value of the priority.

References LOG4C_PRIORITY_UNKNOWN.

8.17.3.2 LOG4C_API const char* log4c_priority_to_string (int *a_priority*)

Parameters

<i>a_priority</i>	a numeric value of the priority.
-------------------	----------------------------------

Returns


the given priority string name.

8.18 rc.h File Reference

log4c resource configuration

```
#include <log4c/defs.h>
```

Include dependency graph for rc.h:



Data Structures

- struct **log4c_rc_t**
resource configuration object

Functions

- LOG4C_API int **log4c_load** (const char **a_filename*)

Variables

- LOG4C_API **log4c_rc_t** *const **log4c_rc**

8.18.1 Detailed Description

log4c resource configuration

8.18.2 Function Documentation**8.18.2.1 LOG4C_API int log4c_load(const char * *a_filename*)**

load log4c resource configuration file

Parameters

<i>a_filename</i>	name of file to load
-------------------	----------------------

8.18.3 Variable Documentation**8.18.3.1 LOG4C_API log4c_rc_t* const log4c_rc**


default log4c resource configuration object

8.19 rollingpolicy.h File Reference

Log4c rolling policy interface. Defines the interface for managing and providing rolling policies.

```
#include <stdio.h>
#include <log4c/defs.h>
#include <log4c/layout.h>
```

Include dependency graph for rollingpolicy.h:

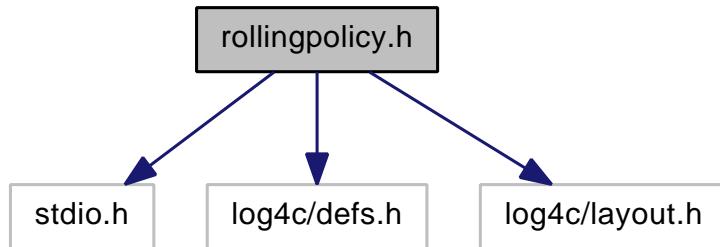

Data Structures

- struct **log4c_rollingpolicy_type**

log4c rollingpolicy type. Defines the interface a specific policy must provide to the rollingfile appender.

Defines

- #define **ROLLINGPOLICY_ROLLOVER_ERR_CAN_LOG** 0x05

TypeDefs

- typedef struct __log4c_rollingpolicy **log4c_rollingpolicy_t**
- typedef struct **log4c_rollingpolicy_type** **log4c_rollingpolicy_type_t**

log4c rollingpolicy type. Defines the interface a specific policy must provide to the rollingfile appender.

Functions

- LOG4C_API **log4c_rollingpolicy_t*** **log4c_rollingpolicy_get**(const char *policy_name)
- LOG4C_API const **log4c_rollingpolicy_type_t** * **log4c_rollingpolicy_type_set**(const **log4c_rollingpolicy_type_t** *a_type)
- LOG4C_API void **log4c_rollingpolicy_set_udata**(**log4c_rollingpolicy_t***policyp, void *udatap)
- LOG4C_API int **log4c_rollingpolicy_init**(**log4c_rollingpolicy_t***policyp, rollingfile_udata_t *rfup)
- LOG4C_API int **log4c_rollingpolicy_fini**(**log4c_rollingpolicy_t***a_this)
- LOG4C_API int **log4c_rollingpolicy_is_triggering_event**(**log4c_rollingpolicy_t** *policyp, const **log4c_logging_event_t** *evtp, long current_file_size)
- LOG4C_API const **log4c_rollingpolicy_type_t*** **log4c_rollingpolicy_set_type**(**log4c_rollingpolicy_t***a_rollingpolicy, const **log4c_rollingpolicy_type_t** *a_type)

- LOG4C_API const **log4c_rollingpolicy_type_t** * **log4c_rollingpolicy_type_get** (const char *a_name)
- LOG4C_API void * **log4c_rollingpolicy_get_udata** (const **log4c_rollingpolicy_t** *policyp)
- LOG4C_API rollingfile_udata_t * **log4c_rollingpolicy_get_rfudata** (const **log4c_rollingpolicy_t** *policyp)

8.19.1 Detailed Description

Log4c rolling policy interface. Defines the interface for managing and providing rolling policies. A rolling policy is used to configore a rollingfile appender to tell it when to trigger a rollover event.

8.19.2 Define Documentation

8.19.2.1 #define ROLLINGPOLICY_ROLLOVER_ERR_CAN_LOG 0x05

Effect a rollover according to policyp on the given file stream.

Parameters

<i>policyp</i>	pointer to the rolling policy
<i>fp</i>	filestream to rollover.

Returns

zero if successful, non-zero otherwise. The policy can return an indication that something went wrong but that the rollingfile appender can still go ahead and log by returning an error code <= ROLLINGPOLICY_ROLLOVER_ERR_CAN_LOG. Anything greater than means that the rolling file appender will not try to log it's message.

8.19.3 Typedef Documentation

8.19.3.1 typedef struct __log4c_rollingpolicy log4c_rollingpolicy_t

log4c rollingpolicy type

8.19.3.2 typedef struct log4c_rollingpolicy_type log4c_rollingpolicy_type_t

log4c rollingpolicy type. Defines the interface a specific policy must provide to the rollingfile appender.

Attributes description:

- name rollingpolicy type name

- `init()` init the rollingpolicy
- `is_triggering_event()`
- `rollover()`

8.19.4 Function Documentation

8.19.4.1 LOG4C_API int log4c_rollingpolicy_fini(log4c_rollingpolicy_t * *a_this*)

Call the un initialization code of a rolling policy. This will call the fini routine of the particular rollingpolicy type to allow it to free up resources. If the call to fini in the rollingpolicy type fails then the rollingpolicy is not uninitialized. Try again later model...

Parameters

<i>policyp</i>	pointer to the rolling policy
----------------	-------------------------------

Returns

zero if successful, non-zero otherwise.

8.19.4.2 LOG4C_API log4c_rollingpolicy_t* log4c_rollingpolicy_get(const char * *policy_name*)

Get a new rolling policy

Parameters

<i>policy_name</i>	a name for the policy
--------------------	-----------------------

Returns

a new rolling policy, otherwise NULL.

8.19.4.3 LOG4C_API rollingfile_udata_t* log4c_rollingpolicy_get_rfudata(const log4c_rollingpolicy_t * *policyp*)

Get the rollingfile appender associated with this policy.

Parameters

<i>policyp</i>	pointer to the rolling policy
----------------	-------------------------------

Returns

pointer to the rolling file appender associated with this policy

8.19.4.4 LOG4C_API void* log4c_rollingpolicy_get_udata (const log4c_rollingpolicy_t * *policyp*)

Get the rolling policy configuration.

Parameters

<i>policyp</i>	pointer to the rolling policy
----------------	-------------------------------

Returns

pointer to the rolling policy configuration.

8.19.4.5 LOG4C_API int log4c_rollingpolicy_init (log4c_rollingpolicy_t * *policyp*, rollingfile_udata_t * *rfup*)

Call the initialization code of a rolling policy.

Parameters

<i>policyp</i>	pointer to the rolling policy
<i>app</i>	the rolling appender this policy is used with

Returns

zero if successful, non-zero otherwise.

8.19.4.6 LOG4C_API int log4c_rollingpolicy_is_triggering_event (log4c_rollingpolicy_t * *policyp*, const log4c_logging_event_t * *evtp*, long *current_file_size*)

Determine if a logging event should trigger a rollover according to the given policy.

Parameters

<i>policyp</i>	pointer to the rolling policy
<i>evtp</i>	the logging event pointer.
<i>current_file_size</i>	the size of the current file being logged to.

Returns

non-zero if rollover required, zero otherwise.

8.19.4.7 LOG4C_API const log4c_rollingpolicy_type_t* log4c_rollingpolicy_set_type (log4c_rollingpolicy_t * *a_rollingpolicy*, const log4c_rollingpolicy_type_t * *a_type*)

sets the rolling policy type

Parameters

<i>a_-rollingpolicy</i>	the log4c_rollingpolicy_t object
<i>a_type</i>	the new rollingpolicy type

Returns

the previous appender type

8.19.4.8 LOG4C_API void log4c_rollingpolicy_set_udata (
log4c_rollingpolicy_t * *policyp*, void * *udatap*)

Configure a rolling policy with a specific policy.

Parameters

<i>policyp</i>	pointer to the rolling policy
<i>udatap</i>	a specific policy type, for example sizewin.

Returns

zero if successful, non-zero otherwise.

**8.19.4.9 LOG4C_API const log4c_rollingpolicy_type_t*
log4c_rollingpolicy_type_get (const char * *a_name*)**

Get a pointer to an existing rollingpolicy type.

Parameters

<i>a_name</i>	the name of the rollingpolicy type to return.
---------------	---

Returns

a pointer to an existing rollingpolicy type, or NULL if no rollingpolicy type with the specified name exists.

**8.19.4.10 LOG4C_API const log4c_rollingpolicy_type_t*
log4c_rollingpolicy_type_set (const log4c_rollingpolicy_type_t *
a_type)**

Use this function to register a rollingpolicy type with log4c. Once this is done you may refer to this type by name both programmatically and in the log4c configuration file.

Parameters

<i>a_type</i>	a pointer to the new rollingpolicy type to register.
---------------	--

Returns

a pointer to the previous rollingpolicy type of same name.

Example code fragment:

```
const log4c_rollingpolicy_type_t log4c_rollingpolicy_type_sizewin = {
    "sizewin",
    sizewin_init,
    sizewin_is_triggering_event,
    sizewin_rollover
};


log4c_rollingpolicy_type_set(&log4c_rollingpolicy_type_sizewin);
```

8.20 rollingpolicy_type_sizewin.h File Reference

Log4c rolling file size-win interface. Log4c ships with (and defaults to) the classic size-window rollover policy: this triggers rollover when files reach a maximum size. The first file in the list is always the current file; when a rollover event occurs files are shifted up by one position in the list—if the number of files in the list has already reached the max then the oldest file is rotated out of the window.

```
#include <log4c/defs.h>
#include <log4c/rollingpolicy.h>
```

Include dependency graph for rollingpolicy_type_sizewin.h:

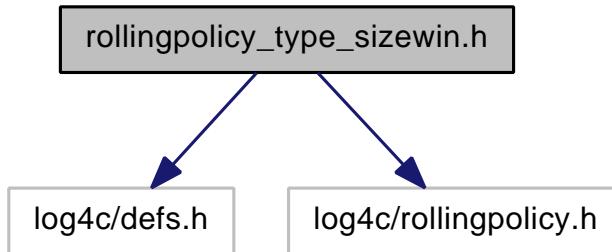**TypeDefs**

- `typedef struct __sizewin_udata rollingpolicy_sizewin_udata_t`

Functions

- `LOG4C_API rollingpolicy_sizewin_udata_t * sizewin_make_udata (void)`
- `LOG4C_API int sizewin_udata_set_file_maxsize(rollingpolicy_sizewin_udata_t *swup, long max_size)`
- `LOG4C_API int sizewin_udata_set_max_num_files(rollingpolicy_sizewin_udata_t *swup, long max_num)`
- `LOG4C_API int sizewin_udata_set_appender(rollingpolicy_sizewin_udata_t *swup, log4c_appender_t *app)`

8.20.1 Detailed Description

Log4c rolling file size-win interface. Log4c ships with (and defaults to) the classic size-window rollover policy: this triggers rollover when files reach a maximum size. The first file in the list is always the current file; when a rollover event occurs files are shifted up by one position in the list--if the number of files in the list has already reached the max then the oldest file is rotated out of the window. If the max file size is set to zero, this means 'no-limit'.

The default parameters for the size-win policy are 5 files of maximum size of 20kilobytes each. These parameters may be changed using the appropriate setter functions.

8.20.2 Typedef Documentation

8.20.2.1 `typedef struct __sizewin_udata rollingpolicy_sizewin_udata_t`

log4c size-win rolling policy type

8.20.3 Function Documentation

8.20.3.1 `LOG4C_API rollingpolicy_sizewin_udata_t* sizewin_make_udata (void)`

Get a new size-win rolling policy

Returns

a new size-win rolling policy, otherwise NULL.

8.20.3.2 `LOG4C_API int sizewin_udata_set_appender (rollingpolicy_sizewin_udata_t * swup, log4c_appender_t * app)`

Set the rolling file appender in this rolling policy configuration.

Parameters

<code>swup</code>	the size-win configuration object.
<code>app</code>	the rolling file appender to set.

Returns

zero if successful, non-zero otherwise.

8.20.3.3 `LOG4C_API int sizewin_udata_set_file_maxsize (rollingpolicy_sizewin_udata_t * swup, long max_size)`

Set the maximum file size in this rolling policy configuration.

Parameters

<i>swup</i>	the size-win configuration object.
<i>max_size</i>	the approximate maximum size any logging file will attain. If you set zero then it means 'no-limit' and so only one file of unlimited size will be used for logging.

Returns

zero if successful, non-zero otherwise.

8.20.3.4 LOG4C_API int sizewin_udata_set_max_num_files (rollingpolicy_sizewin_udata_t * *swup*, long *max_num*)

Set the maximum number of files in this rolling policy configuration.

Parameters

<i>swup</i>	the size-win configuration object.
<i>max_num</i>	the maximum number of files in the list.

Returns


zero if successful, non-zero otherwise.

8.21 version.h File Reference

log4c version information

```
#include <log4c/defs.h>
```

Include dependency graph for version.h:

**Defines**

- #define **LOG4C_MAJOR_VERSION** 1
- #define **LOG4C_MINOR_VERSION** 2
- #define **LOG4C_MICRO_VERSION** 1

Functions

- const char * **log4c_version** (void)

Variables

- const int **log4c_major_version**
- const int **log4c_minor_version**
- const int **log4c_micro_version**

8.21.1 Detailed Description

log4c version information

8.21.2 Define Documentation**8.21.2.1 #define LOG4C_MAJOR_VERSION 1**

constant macro holding the major version of log4c

8.21.2.2 #define LOG4C_MICRO_VERSION 1

constant macro holding the micro version of log4c

8.21.2.3 #define LOG4C_MINOR_VERSION 2

constant macro holding the minor version of log4c

8.21.3 Function Documentation**8.21.3.1 const char* log4c_version(void)****Returns**

a string containing the full log4c version

8.21.4 Variable Documentation**8.21.4.1 const int log4c_major_version**

constant variable holding the major version of log4c

8.21.4.2 const int log4c_micro_version

constant variable holding the micro version of log4c

8.21.4.3 const int log4c_minor_version

constant variable holding the minor version of log4c

Index

__log4c_category_trace
 category.h, 30

appender.h, 10
 log4c_appender_append, 13
 log4c_appender_close, 13
 log4c_appender_delete, 13
 log4c_appender_get, 14
 log4c_appender_get_layout, 14
 log4c_appender_get_name, 14
 log4c_appender_get_type, 14
 log4c_appender_get_udata, 15
 log4c_appender_new, 15
 log4c_appender_open, 15
 log4c_appender_print, 15
 log4c_appender_set_layout, 16
 log4c_appender_set_type, 16
 log4c_appender_set_udata, 16
 log4c_appender_t, 13
 log4c_appender_type_define, 12
 log4c_appender_type_get, 16
 log4c_appender_type_set, 17
 log4c_appender_type_t, 13
 log4c_appender_types_print, 17

appender_type_mmap.h, 18
 log4c_appender_type_mmap, 18

appender_type_rollingfile.h, 19
 log4c_appender_type_rollingfile, 22
 rollingfile_get_current_file_size, 20
 rollingfile_make_udata, 20
 rollingfile_udata_get_files_prefix, 20
 rollingfile_udata_get_logdir, 21
 rollingfile_udata_set_files_prefix, 21
 rollingfile_udata_set_logdir, 21
 rollingfile_udata_set_policy, 21

appender_type_stream.h, 22
 log4c_appender_type_stream, 23

appender_type_stream2.h, 23
 log4c_appender_type_stream2, 26
 log4c_stream2_get_flags, 25
 log4c_stream2_get_fp, 25
 log4c_stream2_set_flags, 25
 log4c_stream2_set_fp, 26

appender_type_syslog.h, 26
 log4c_appender_type_syslog, 27

buffer.h, 27

category.h, 28
 __log4c_category_trace, 30
 log4c_category_alert, 31
 log4c_category_crit, 31
 log4c_category_debug, 31
 log4c_category_define, 30
 log4c_category_delete, 31
 log4c_category_error, 32
 log4c_category_fatal, 32
 log4c_category_get, 32
 log4c_category_get_additivity, 32
 log4c_category_get_appender, 33
 log4c_category_get_chainedpriority, 33
 log4c_category_get_name, 33
 log4c_category_get_priority, 34
 log4c_category_info, 34
 log4c_category_is_alert_enabled, 34
 log4c_category_is_crit_enabled, 35
 log4c_category_is_debug_enabled, 35
 log4c_category_is_error_enabled, 35
 log4c_category_is_fatal_enabled, 35
 log4c_category_is_info_enabled, 36
 log4c_category_is_notice_enabled, 36
 log4c_category_is_priority_enabled, 36
 log4c_category_is_trace_enabled, 37
 log4c_category_is_warn_enabled, 37
 log4c_category_list, 37
 log4c_category_log, 38
 log4c_category_log_locinfo, 38
 log4c_category_new, 38
 log4c_category_notice, 39
 log4c_category_print, 39
 log4c_category_set_additivity, 39
 log4c_category_set_appender, 40
 log4c_category_set_priority, 40
 log4c_category_t, 30
 log4c_category_warn, 40

init.h, 41
 log4c_fini, 41
 log4c_init, 41

layout.h, 42
 log4c_layout_delete, 44
 log4c_layout_format, 44
 log4c_layout_get, 44
 log4c_layout_get_name, 45

log4c_layout_get_type, 45
log4c_layout_get_udata, 45
log4c_layout_new, 46
log4c_layout_print, 46
log4c_layout_set_type, 46
log4c_layout_set_udata, 46
log4c_layout_t, 44
log4c_layout_type_define, 43
log4c_layout_type_get, 46
log4c_layout_type_set, 47
log4c_layout_type_t, 44
 log4c_layout_types_print, 47
layout_type_basic.h, 47
layout_type_basic_r.h, 48
layout_type_dated.h, 49
layout_type_dated_r.h, 50
location_info.h, 50
 log4c_location, 51
LOG4C_LOCATION_INFO_INITIALIZER
 51
log4c_appender_append
 appender.h, 13
log4c_appender_close
 appender.h, 13
log4c_appender_delete
 appender.h, 13
log4c_appender_get
 appender.h, 14
log4c_appender_get_layout
 appender.h, 14
log4c_appender_get_name
 appender.h, 14
log4c_appender_get_type
 appender.h, 14
log4c_appender_get_udata
 appender.h, 15
log4c_appender_new
 appender.h, 15
log4c_appender_open
 appender.h, 15
log4c_appender_print
 appender.h, 15
log4c_appender_set_layout
 appender.h, 16
log4c_appender_set_type
 appender.h, 16
log4c_appender_set_udata
 appender.h, 16
log4c_appender_t
 appender.h, 13

log4c_appender_type, 7
log4c_appender_type_define
 appender.h, 12
log4c_appender_type_get
 appender.h, 16
log4c_appender_type_mmap
 appender_type_mmap.h, 18
log4c_appender_type_rollingfile
 appender_type_rollingfile.h, 22
log4c_appender_type_set
 appender.h, 17
log4c_appender_type_stream
 appender_type_stream.h, 23
log4c_appender_type_stream2
 appender_type_stream2.h, 26
log4c_appender_type_syslog
 appender_type_syslog.h, 27
log4c_appender_type_t
 appender.h, 13
log4c_appender_types_print
 appender.h, 17
log4c_buffer_t, 7
log4c_category_alert
 category.h, 31
log4c_category_crit
 category.h, 31
log4c_category_debug
 category.h, 31
log4c_category_define
 category.h, 30
log4c_category_delete
 category.h, 31
log4c_category_error
 category.h, 32
log4c_category_fatal
 category.h, 32
log4c_category_get
 category.h, 32
log4c_category_get_additivity
 category.h, 32
log4c_category_get_appender
 category.h, 33
log4c_category_get_chainedpriority
 category.h, 33
log4c_category_get_name
 category.h, 33
log4c_category_get_priority
 category.h, 34
log4c_category_info
 category.h, 34

log4c_category_is_alert_enabled
 category.h, 34
log4c_category_is_crit_enabled
 category.h, 35
log4c_category_is_debug_enabled
 category.h, 35
log4c_category_is_error_enabled
 category.h, 35
log4c_category_is_fatal_enabled
 category.h, 35
log4c_category_is_info_enabled
 category.h, 36
log4c_category_is_notice_enabled
 category.h, 36
log4c_category_is_priority_enabled
 category.h, 36
log4c_category_is_trace_enabled
 category.h, 37
log4c_category_is_warn_enabled
 category.h, 37
log4c_category_list
 category.h, 37
log4c_category_log
 category.h, 38
log4c_category_log_locinfo
 category.h, 38
log4c_category_new
 category.h, 38
log4c_category_notice
 category.h, 39
log4c_category_print
 category.h, 39
log4c_category_set_additivity
 category.h, 39
log4c_category_set_appender
 category.h, 40
log4c_category_set_priority
 category.h, 40
log4c_category_t
 category.h, 30
log4c_category_warn
 category.h, 40
log4c_fini
 init.h, 41
log4c_init
 init.h, 41
log4c_layout_delete
 layout.h, 44
log4c_layout_format
 layout.h, 44

log4c_layout_get
 layout.h, 44
log4c_layout_get_name
 layout.h, 45
log4c_layout_get_type
 layout.h, 45
log4c_layout_get_udata
 layout.h, 45
log4c_layout_new
 layout.h, 46
log4c_layout_print
 layout.h, 46
log4c_layout_set_type
 layout.h, 46
log4c_layout_set_udata
 layout.h, 46
log4c_layout_t
 layout.h, 44
log4c_layout_type, 8
log4c_layout_type_define
 layout.h, 43
log4c_layout_type_get
 layout.h, 46
log4c_layout_type_set
 layout.h, 47
log4c_layout_type_t
 layout.h, 44
log4c_layout_types_print
 layout.h, 47
log4c_load
 rc.h, 56
log4c_location
 location_info.h, 51
LOG4C_LOCATION_INFO_INITIALIZER
 location_info.h, 51
log4c_location_info_t, 8
log4c_logging_event_delete
 logging_event.h, 52
log4c_logging_event_new
 logging_event.h, 53
log4c_logging_event_t, 9
LOG4C_MAJOR_VERSION
 version.h, 65
log4c_major_version
 version.h, 65
LOG4C_MICRO_VERSION
 version.h, 65
log4c_micro_version
 version.h, 65
LOG4C_MINOR_VERSION

version.h, 65
log4c_minor_version
 version.h, 66
LOG4C_PRIORITY_ALERT
 priority.h, 54
LOG4C_PRIORITY_CRIT
 priority.h, 54
LOG4C_PRIORITY_DEBUG
 priority.h, 54
LOG4C_PRIORITY_ERROR
 priority.h, 54
LOG4C_PRIORITY_FATAL
 priority.h, 54
LOG4C_PRIORITY_INFO
 priority.h, 54
log4c_priority_level_t
 priority.h, 54
LOG4C_PRIORITY_NOTICE
 priority.h, 54
LOG4C_PRIORITY_NOTSET
 priority.h, 54
log4c_priority_to_int
 priority.h, 55
log4c_priority_to_string
 priority.h, 55
LOG4C_PRIORITY_TRACE
 priority.h, 54
LOG4C_PRIORITY_UNKNOWN
 priority.h, 54
LOG4C_PRIORITY_WARN
 priority.h, 54
log4c_rc
 rc.h, 56
log4c_rc_t, 9
log4c_rollingpolicy_fini
 rollingpolicy.h, 59
log4c_rollingpolicy_get
 rollingpolicy.h, 59
log4c_rollingpolicy_get_rfudata
 rollingpolicy.h, 59
log4c_rollingpolicy_get_udata
 rollingpolicy.h, 59
log4c_rollingpolicy_init
 rollingpolicy.h, 60
log4c_rollingpolicy_is_triggering_event
 rollingpolicy.h, 60
log4c_rollingpolicy_set_type
 rollingpolicy.h, 60
log4c_rollingpolicy_set_udata
 rollingpolicy.h, 61
log4c_rollingpolicy_t
 rollingpolicy.h, 58
log4c_rollingpolicy_type, 10
log4c_rollingpolicy_type_get
 rollingpolicy.h, 61
log4c_rollingpolicy_type_set
 rollingpolicy.h, 61
log4c_rollingpolicy_type_t
 rollingpolicy.h, 58
log4c_stream2_get_flags
 appender_type_stream2.h, 25
log4c_stream2_get_fp
 appender_type_stream2.h, 25
log4c_stream2_set_flags
 appender_type_stream2.h, 25
log4c_stream2_set_fp
 appender_type_stream2.h, 26
log4c_version
 version.h, 65
logging_event.h, 52
 log4c_logging_event_delete, 52
 log4c_logging_event_new, 53
priority.h, 53
 LOG4C_PRIORITY_ALERT, 54
 LOG4C_PRIORITY_CRIT, 54
 LOG4C_PRIORITY_DEBUG, 54
 LOG4C_PRIORITY_ERROR, 54
 LOG4C_PRIORITY_FATAL, 54
 LOG4C_PRIORITY_INFO, 54
 log4c_priority_level_t, 54
 LOG4C_PRIORITY_NOTICE, 54
 LOG4C_PRIORITY_NOTSET, 54
 log4c_priority_to_int, 55
 log4c_priority_to_string, 55
 LOG4C_PRIORITY_TRACE, 54
 LOG4C_PRIORITY_UNKNOWN, 54
 LOG4C_PRIORITY_WARN, 54
rc.h, 55
 log4c_load, 56
 log4c_rc, 56
rollingfile_get_current_file_size
 appender_type_rollingfile.h, 20
rollingfile_make_udata
 appender_type_rollingfile.h, 20
rollingfile_udata_get_files_prefix
 appender_type_rollingfile.h, 20
rollingfile_udata_get_logdir
 appender_type_rollingfile.h, 21

rollingfile_udata_set_files_prefix
 appender_type_rollingfile.h, 21
rollingfile_udata_set_logdir
 appender_type_rollingfile.h, 21
rollingfile_udata_set_policy
 appender_type_rollingfile.h, 21
rollingpolicy.h, 56
 log4c_rollingpolicy_fini, 59
 log4c_rollingpolicy_get, 59
 log4c_rollingpolicy_get_rfudata, 59
 log4c_rollingpolicy_get_udata, 59
 log4c_rollingpolicy_init, 60
 log4c_rollingpolicy_is_triggering_event,
 60
 log4c_rollingpolicy_set_type, 60
 log4c_rollingpolicy_set_udata, 61
 log4c_rollingpolicy_t, 58
 log4c_rollingpolicy_type_get, 61
 log4c_rollingpolicy_type_set, 61
 log4c_rollingpolicy_type_t, 58
 ROLLINGPOLICY_ROLLOVER_ERR_-
 CAN_LOG, 58
ROLLINGPOLICY_ROLLOVER_ERR_-
 CAN_LOG
 rollingpolicy.h, 58
rollingpolicy_sizewin_udata_t
 rollingpolicy_type_sizewin.h, 63
rollingpolicy_type_sizewin.h, 62
 rollingpolicy_sizewin_udata_t, 63
 sizewin_make_udata, 63
 sizewin_udata_set_appender, 63
 sizewin_udata_set_file_maxsize, 63
 sizewin_udata_set_max_num_files, 64

 sizewin_make_udata
 rollingpolicy_type_sizewin.h, 63
 sizewin_udata_set_appender
 rollingpolicy_type_sizewin.h, 63
 sizewin_udata_set_file_maxsize
 rollingpolicy_type_sizewin.h, 63
 sizewin_udata_set_max_num_files
 rollingpolicy_type_sizewin.h, 64

version.h, 64
 LOG4C_MAJOR_VERSION, 65
 log4c_major_version, 65
 LOG4C_MICRO_VERSION, 65
 log4c_micro_version, 65
 LOG4C_MINOR_VERSION, 65
 log4c_minor_version, 66